

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H01L 33/00</b>		A1	(11) International Publication Number: <b>WO 96/09653</b>
			(43) International Publication Date: 28 March 1996 (28.03.96)
(21) International Application Number: <b>PCT/US95/11472</b>		(74) Agents: SUMMA, Philip et al.; Bell, Seltzer, Park & Gibson, P.O. Drawer 34009, Charlotte, NC 28234 (US).	
(22) International Filing Date: 19 September 1995 (19.09.95)			
(30) Priority Data: 309,251 20 September 1994 (20.09.94) US		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(60) Parent Application or Grant (63) Related by Continuation US 309,251 (CON) Filed on 20 September 1994 (20.09.94)		Published With international search report.	
(71) Applicant (for all designated States except US): CREE RE- SEARCH INC. [US/US]; Suite 176, 2810 Meridian Park- way, Durham, NC 27713 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): EDMOND, John, Adam [US/US]; 206 W. Jules Verne Way, Cary, NC 27511 (US). BULMAN, Gary, E. [US/US]; 404 Ralph Drive, Cary, NC 27511 (US). KONG, Hua-Shuang [CN/US]; 10840 Bexhill Drive, Raleigh, NC 27606 (US). DMITRIEV, Vladimir [RU/US]; 5425 Lafayette Drive, Fuquay-Varina, NC 27526 (US).			

(54) Title: VERTICAL GEOMETRY LIGHT EMITTING DIODE WITH GROUP III NITRIDE ACTIVE LAYER AND EXTENDED LIFETIME

## (57) Abstract

A light emitting diode (20) emits in the blue portion of the visible spectrum and is characterized by an extended lifetime. The light emitting diode comprises a conductive silicon carbide substrate (21); an ohmic contact (22) to the silicon carbide substrate; a conductive buffer layer (23) on the substrate and selected from the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one, or a fraction between zero and one, and alloys of silicon carbide with such ternary Group III nitrides; and a double heterostructure (24) including a p-n junction on the buffer layer in which the active (25) and heterostructure layers (26, 27) are selected from the group consisting of binary Group III nitrides and ternary Group III nitrides.

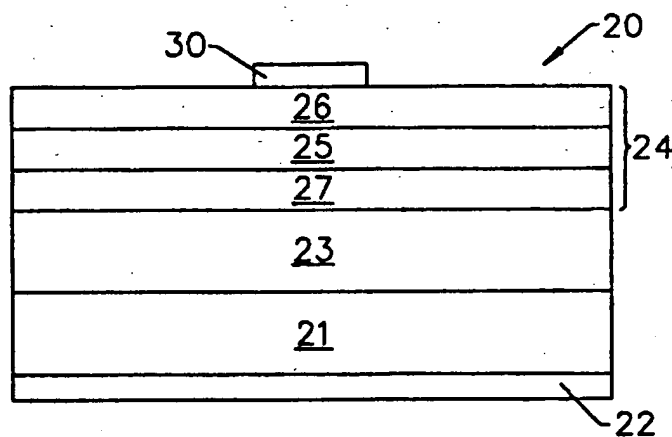

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

VERTICAL GEOMETRY LIGHT EMITTING DIODE WITH GROUP III  
NITRIDE ACTIVE LAYER AND EXTENDED LIFETIME

Field Of The Invention

This invention relates to optoelectronic devices and more particularly to light emitting diodes formed from Group III nitrides (i.e., Group III of the Periodic Table of the Elements) that will produce output in the blue to ultraviolet portions of the electromagnetic spectrum.

Background Of The Invention

Light emitting diodes ("LEDs") are p-n junction devices that have been found to be useful in various roles as the field of optoelectronics has grown and expanded over the years. Devices that emit in the visible portion of the electromagnetic spectrum have been used as simple status indicators, dynamic power level bar graphs, and alphanumeric displays in many applications, such as audio systems, automobiles, household electronics, and computer systems, among many others. Infrared devices have been used in conjunction with spectrally matched phototransistors in optoisolators, hand-held remote controllers, and interruptive, reflective, and fiber-optic sensing applications.

An LED operates based on the recombination of electrons and holes in a semiconductor. When an electron carrier in the conduction band combines with a

-2-

hole in the valence band, it loses energy equal to the bandgap in the form of an emitted photon; i.e., light. The number of recombination events under equilibrium conditions is insufficient for practical applications  
5 but can be enhanced by increasing the minority carrier density.

In an LED, the minority carrier density is conventionally increased by forward biasing the diode. The injected minority carriers radiatively recombine  
10 with the majority carriers within a few diffusion lengths of the junction edge. Each recombination event produces electromagnetic radiation, i.e., a photon. Because the energy loss is related to the bandgap of the semiconductor material, the bandgap characteristics  
15 of the LED material has been recognized as being important.

As with other electronic devices, however, there exists both the desire and the need for more efficient LEDs, and in particular, LEDs that will  
20 operate at higher intensity while using less power. Higher intensity LEDs, for example, are particularly useful for displays or status indicators in various high ambient environments. There also is a relation between intensity output of the LED and the power  
25 required to drive the LED. Low power LEDs, for example, are particularly useful in various portable electronic equipment applications. An example of an attempt to meet this need for higher intensity, lower power, and more efficient LEDs may be seen with the  
30 development of the AlGaAs LED technology for LEDs in the red portions of the visible spectrum. A similar continual need has been felt for LEDs that will emit in the blue and ultraviolet regions of the visible spectrum. For example, because blue is a primary  
35 color, its presence is either desired or even necessary to produce full color displays or pure white light.

-3-

The common assignee of the present patent application was the first in this field to successfully develop commercially viable LEDs available in large quantities and that emitted light in the blue color spectrum. These LEDs were formed in silicon carbide, a wide bandgap semiconductor material. Examples of such blue LEDs are described in U.S. Patent Nos. 4,918,497 and 5,027,168 to Edmond each titled *"Blue Light Emitting Diode Formed In Silicon Carbide."*

Other examples of such a blue LED are described in U.S. Patent No. 5,306,662 to Nakamura et al. titled *"Method Of Manufacturing P-Type Compound Semiconductor"* and U.S. Patent No. 5,290,393 to Nakamura titled *"Crystal Growth Method For Gallium Nitride-Based Compound Semiconductor."* U.S. Patent No. 5,273,933 to Hatano et al. titled *"Vapor Phase Growth Method Of Forming Film In Process Of Manufacturing Semiconductor Device"* also describes LEDs formed of GaInAlN on SiC substrates and Zinc Selenide (ZnSe) on gallium arsenide (GaAs) substrates.

As known to those familiar with photonic devices such as LEDs, the frequency of electromagnetic radiation (i.e., the photons) that can be produced by a given semiconductor material are a function of the material's bandgap. Smaller bandgaps produce lower energy, longer wavelength photons, while wider bandgap materials are required to produce higher energy, shorter wavelength photons. For example, one semiconductor commonly used for lasers is indium gallium aluminum phosphide (InGaAlP). Because of this material's bandgap (actually a range of bandgaps depending upon the mole or atomic fraction of each element present), the light that InGaAlP can produce is limited to the red portion of the visible spectrum, i.e., about 600 to 700 nanometers (nm).

Working backwards, in order to produce photons that have wavelengths in the blue or

-4-

ultraviolet portions of the spectrum, semiconductor materials are required that have relatively large bandgaps. Typical candidate materials include silicon carbide (SiC) and gallium nitride (GaN).

5           Shorter wavelength LEDs offer a number of advantages in addition to color. In particular, when used in optical storage and memory devices (e.g., "CD-ROM" or "optical disks"), their shorter wavelengths enable such storage devices to hold proportionally more  
10 information. For example, an optical device storing information using blue light can hold approximately 32 times as much information as one using red light, in the same space.

          Gallium nitride, however, is an attractive  
15 LED candidate material for blue and UV frequencies because of its relatively high bandgap (3.36 eV at room temperature) and because it is a direct bandgap material rather than an indirect bandgap material. As known to those familiar with semiconductor  
20 characteristics, a direct bandgap material is one in which an electron's transition from the valence band to the conduction band does not require a change in crystal momentum for the electron. In indirect semiconductors, the alternative situation exists; i.e.,  
25 a change of crystal momentum is required for an electron's transition between the valence and conduction bands. Silicon and silicon carbide are examples of such indirect semiconductors.

          Generally speaking, an LED formed in a direct  
30 bandgap material will perform more efficiently than one formed in an indirect bandgap material because the photon from the direct transition retains more energy than one from an indirect transition.

          Gallium nitride suffers from a different  
35 disadvantage, however: the failure to date of any workable technique for producing bulk single crystals of gallium nitride which could form appropriate

-5-

substrates for gallium nitride photonic devices. As is known to those familiar with semiconductor devices, they all require some sort of structural substrate. Typically, a substrate formed of the same materials as the active region of a device offers significant advantages, particularly in crystal growth and matching. Because gallium nitride has yet to be formed in such bulk crystals, however, gallium nitride photonic devices must be formed in epitaxial layers on different--i.e., other than GaN--substrates.

Using different substrates, however, causes an additional set of problems, mostly in the area of crystal lattice matching. In almost all cases, different materials have different crystal lattice parameters. As a result, when a gallium nitride epitaxial layer is grown on a different substrate, some crystal mismatch will occur, and the resulting epitaxial layer is referred to as being "strained" by this mismatch. Such mismatches, and the strain they produce, carry with them the potential for crystal defects which in turn affect the electronic characteristics of the crystals and the junctions, and thus correspondingly tend to degrade or even prevent the performance of the photonic device. Such defects are even more problematic in higher power structures.

To date, the most common substrate for gallium nitride devices--and the only substrate utilized in GaN LED's--has been sapphire; i.e., aluminum oxide ( $\text{Al}_2\text{O}_3$ ). Sapphire is optically transparent in the visible and UV ranges, but is unfortunately insulating rather than conductive, and carries a lattice mismatch with gallium nitride of about 16%. In the absence of a conductive substrate, "vertical" devices (those with contacts on opposite sides) cannot be formed, thus complicating the manufacture and use of the devices.

-6-

As a particular disadvantage, horizontal structures (those with contacts on the same side of the device), such as those required when gallium nitride is formed on sapphire, also produce a horizontal flow of current and therefore the current density through the layer is substantially increased. This horizontal current flow puts an additional strain on the already-strained (i.e., the 16% lattice mismatch) GaN-sapphire structure and accelerates the degradation of the junction and the device as a whole.

Gallium nitride also carries a lattice mismatch of about 2.4% with aluminum nitride (AlN) and a 3.5% mismatch with silicon carbide. Silicon Carbide has a somewhat lesser mismatch (only about 1%) with aluminum nitride.

Group III ternary and quaternary nitrides (e.g., InGaN, InGaAlN, etc.) have also been shown to have relatively wide bandgaps and thus also offer the potential for blue and ultraviolet semiconductor lasers. Most of these compounds, however, present the same difficulty as gallium nitride: the lack of an identical single crystal substrate. Thus, each must be used in the form of epitaxial layers grown on different substrates. Thus, they present the same potential for crystal defects and their associated electronic problems.

#### Object And Summary Of The Invention

Therefore, it is an object of the present invention to provide a light emitting diode that can emit in the blue and ultraviolet portions of the electromagnetic spectrum, that can be built in the vertical geometry that is most advantageous for such devices, that has excellent brightness and efficiency and that can exhibit better physical and electronic longevity and performance than can previously available diodes.



-7-

The invention meets this object with a light emitting diode that emits in the blue portion of the visible spectrum and that is characterized by an extended lifetime because of its advantageous materials and structure. The light emitting diode comprises a conductive silicon carbide substrate; an ohmic contact to the silicon carbide substrate; a conductive buffer layer on the substrate and selected from the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one, or a fraction between zero and one, quaternary Group III nitrides having the formula  $A_xB_yC_{1-x-y}N$  where A, B, and C are Group III elements; x and y, are zero, one, or a fraction between zero and one, and 1 is greater than (x + y), and alloys of silicon carbide with such ternary and quaternary Group III nitrides; and a double heterostructure including a p-n junction on the buffer layer in which the active and heterostructure layers are selected from the group consisting of binary Group III nitrides, ternary Group III nitrides, quaternary Group III nitrides, and alloys of silicon carbide with such nitrides.

The foregoing and other objects, advantages and features of the invention, and the manner in which the same are accomplished, will become more readily apparent upon consideration of the following detailed description of the invention taken in conjunction with the accompanying drawings, which illustrate preferred and exemplary embodiments, and wherein:

#### Brief Description Of The Drawings

Figure 1 schematically illustrates a vertical sectional view of a first embodiment of an extended lifetime light emitting diode according to the present invention;

-8-

Figure 2 schematically illustrates a vertical sectional view of a second embodiment of an extended lifetime light emitting diode according to the present invention;

5           Figure 3 schematically illustrates a vertical sectional view of a third embodiment of an extended lifetime light emitting diode according to the present invention;

10           Figure 4 schematically illustrates a vertical sectional view of a fourth embodiment of an extended lifetime light emitting diode according to the present invention;

15           Figure 5 graphically illustrates relative intensity over time of a prior art light emitting diode in comparison to a light emitting diode according to the present invention;

20           Figure 6 graphically illustrates a double crystal X-ray rocking curve for a GaN layer on a SiC substrate as used in a light emitting diode according to the present invention;

25           Figure 7 graphically illustrates photoluminescence as compared to energy output of a GaN layer on a SiC substrate as utilized in an extended lifetime light emitting diode according to the present invention;

            Figure 8 graphically illustrates intensity as compared to kinetic energy of an alloy of SiC-AlN-GaN; and

30           Figure 9 graphically illustrates crystal lattice peak energy as a function of silicon carbide concentration in a SiC-AlN-GaN alloy according to the present invention.

#### Detailed Description Of A Preferred Embodiment

35           The present invention is a light-emitting diode that produces light in the blue portion of the visible spectrum and that is characterized by an

-9-

extended lifetime. As known to those familiar with the performance, characteristics and ratings of such light-emitting diodes, the lifetime is generally defined as the time over which the LED's output will degrade to about 50% of its original output.

Figure 1 is a cross-sectional schematic view of a light-emitting diode according to the present invention and generally designated at 20. The diode comprises a conductive silicon carbide substrate 21 which, in preferred embodiments, is a single crystal silicon carbide substrate. As is well understood by those of ordinary skill in this art, a high quality single crystal substrate provides a number of structural advantages that in turn provide significant performance and lifetime advantages. In preferred embodiments, the SiC substrates can be formed by the methods described in U.S. Patent No. 4,866,005 (now No. RE \_\_\_\_\_) which is commonly assigned with the pending application.

An ohmic contact 22 is made to the silicon carbide substrate and is one of the characteristics of the present invention that immediately distinguishes it from prior diodes of the materials discussed herein. As noted earlier, the typical substrate for gallium nitride is sapphire, which cannot be made conductive, and thus cannot be connected to an ohmic contact. This prevents a sapphire-based device from being formed in the vertical structure that is most preferred for LEDs and many other devices.

Figure 1 further illustrates that the LED 20 comprises a buffer layer 23 on the substrate 21. The buffer layer 23 is selected from the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one or a fraction between zero and one, quaternary Group III nitrides having the formula  $A_xB_yC_{1-x-y}N$ .

-10-

$yN$  where A, B, and C are Group III elements, x and y, are zero, one, or a fraction between zero and one, and 1 is greater than (x + y) and alloys of silicon carbide with such ternary and quaternary Group III nitrides.

5 The buffer layer 23 and the substrate 21 are both conductive.

The LED 20 further includes a double heterostructure designated by the brackets 24, and specifically including a p-n junction, on the buffer  
10 layer 23. The structural designation "double heterostructure" is used in a manner common to, and well understood in, this art. Aspects of these structures are discussed, for example, in Sze, *Physics of Semiconductor Devices*, Second Edition (1981) at  
15 pages 708-710. The Sze discussion on those pages refers to lasers, but illustrates the nature of, and the distinction between, homostructure, single heterostructure, and double heterostructure junctions.

In the embodiment illustrated in Figure 1,  
20 the double heterostructure 24 further comprises an active layer 25 along with upper 26 and lower 27 heterostructure layers adjacent the active layer 25. The heterostructure layers 26 and 27 are preferably formed of a composition selected from the group  
25 consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one or a fraction between zero and one, and alloys of silicon carbide with such ternary Group III  
30 nitrides, e.g.,

$(SiC)_x A_y B_{1-y} N$ . Stated differently, the lowest heterostructure layer will be on top of the buffer layer. In Figure 1, this is illustrated as lower heterostructure 27 being on top of buffer layer 23.

35 An ohmic contact 30 can be applied to the upper heterostructure layer 26 to complete the advantageous vertical structure of the invention. The

-11-

ohmic contacts preferably are each formed of a metal such as aluminum (Al), gold (Au), platinum (Pt), or nickel (Ni), but may be formed of other material for forming ohmic contacts as understood by those skilled in the art.

In each of the embodiments illustrated herein, the double heterostructure comprises an active layer selected from the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one or a fraction between zero and one, and alloys of silicon carbide with such ternary Group III nitrides.

In the heterostructure 24 illustrated in Figure 1, the active layer 25 can preferably comprise indium gallium nitride and the upper and lower heterostructure layers 26 and 27 will preferably comprise aluminum gallium nitride. More specifically, the aluminum gallium nitride heterostructure layers 26 and 27 preferably have the formula  $Al_xGa_{1-x}N$  where x is zero, one or a fraction between zero and one. When the active layer 25 comprises indium gallium nitride, the composition will be understood to be  $In_zGa_{1-z}N$ , where z is a fraction between zero and one.

As known to those of ordinary skill in this art, the composition of the ternary Group III nitrides can affect both their refractive index and their bandgap. Generally speaking, a larger proportion of aluminum increases the bandgap and decreases the refractive index. Thus, in preferred embodiments, in order for the heterostructure layers 26 and 27 to have a bandgap larger than the active layer 25 and a refractive index smaller than the active layer 25, the layers 26 and 27 have a higher atomic or mole percentage of aluminum than does the active layer 25. The larger bandgap of the heterostructure layers 26 and 27 encourages electrons to be injected through the

-12-

active layer 25 thus increasing the efficiency of the device. Similarly, the lower refractive index of the heterostructure layers 26 and 27 encourage the light to be more preferably emitted on an optical basis from  
5 active layer 25.

In order to form the p-n junction, the upper and lower heterostructure layers 26 and 27 have opposite conductivity types from one another, and the active layer 25 has the same conductivity type as one  
10 of the two heterostructure layers. For example, in a preferred embodiment, the upper heterostructure layer 26 is p-type, the active layer 25 is n-type, the lower heterostructure layer 27 is n-type, and the buffer and the silicon carbide substrate are both also n-type.  
15 The p-n junction is thus formed between the active layer 25 and the upper heterostructure layer 26.

Figure 2 illustrates a slightly different embodiment of the present invention broadly designated at 32. As in the previous embodiment, the LED  
20 comprises a silicon carbide substrate 33 and its ohmic contact 34. The double heterostructure is designated by the brackets at 35. In the embodiment of Figure 2, the buffer layer is shown at 36 and comprises gallium nitride, and the overall structure further comprises a  
25 gallium nitride epitaxial layer 37 on the buffer layer between the gallium nitride buffer layer 36 and the double heterostructure 35. An ohmic contact 40 to the double heterostructure 35 completes the advantageous vertical structure of the device.

30 Although specific performance parameters will be discussed later herein, the diodes described herein and illustrated in these and the remaining drawings are expected to have lifetimes of greater than 10,000 hours operating at a forward bias current of 50 milliamps at  
35 room temperature, and lifetimes of greater than 10,000 hours operating at a forward bias current of 30 milliamps at room temperature. It will be recognized

-13-

by those familiar with such devices that these specifications greatly exceed those of presently available devices.

Figure 3 illustrates a third embodiment of the present invention broadly designated at 42. As in the previous embodiments, the diode 42 includes a silicon carbide substrate 43, and an ohmic contact 44 to the substrate 43. The double heterostructure is again designated by the brackets 45 and an upper ohmic contact 46 is made to the double heterostructure 45. In this embodiment, however, the buffer layer comprises first and second layers 47 and 48 respectively. The first layer 47 is on the substrate 43 and is formed of a graded composition of silicon carbide aluminum gallium nitride  $(\text{SiC})_x\text{Al}_y\text{Ga}_{1-y}\text{N}$  in which the portion adjacent the substrate 43 is substantially entirely silicon carbide and the portion furthest from the substrate is substantially entirely aluminum gallium nitride, with the portions therebetween being progressively graded in content from predominantly silicon carbide to predominantly aluminum gallium nitride.

The second layer 48 is on the first layer 47 and is formed of another graded composition of aluminum gallium nitride. In preferred embodiments, the composition of the graded second layer 48 is graded from a composition matching the composition of the first buffer layer 47 at the point where the layers 47 and 48 meet, to a composition matching the composition of the lowest layer of the double heterostructure 45.

With respect to Figure 3, the buffer layer can also be described as having at least one graded layer of silicon carbide and a Group III nitride in which the graded layer is silicon carbide at the interface with the substrate and then progressively graded to a composition matching the composition of the

-14-

lowest layer of the double heterostructure at the interface with the double heterostructure.

The invention can further comprise a strain-minimizing contact layer (not shown) above the active layer in the double heterostructure and that would have a lattice constant substantially the same as the respective buffer layers. Such a strain-minimizing contact layer is set forth in an application filed concurrently herewith by Edmond and Bulman for "Low Strain Laser Structures with Group III Nitride Active Layers," which is commonly assigned with this application and which is incorporated entirely herein by reference. Briefly summarized, the overall strain of such a multi-layered crystalline device is a function of the average of the individual strains based on the differences between their lattice constants. Thus, by adding a layer with a lattice constant substantially the same as the buffer, the weighted average of the strains becomes more consistent and thus reduces the overall strain.

As some additional details, the upper surface of the silicon carbide substrate in any of the embodiments can be doped with aluminum to enhance the crystal growth. As already stated, the substrate and the buffer layers in each embodiment are conductive, and this is usually accomplished by doping each of the layers with appropriate dopants. The silicon carbide substrate can be selected from several of the silicon carbide polytypes specifically including 3C, 4H, 6H, and 15R.

Figure 4 illustrates another embodiment of the present invention broadly designated at 50. The LED 50 is formed on a silicon carbide substrate 51 upon which a buffer layer designated by the brackets 52 is formed. The buffer layer is selected from the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula



-15-

$A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one or a fraction between zero and one, and alloys of silicon carbide with such ternary Group III nitrides. A first Group III nitride layer 53 is formed  
5 on the buffer 52 and has a first conductivity type. A second Group III nitride layer 54 is formed on the first Group III nitride layer 53 and has a second conductivity type so that the first and second Group III nitride layers 53 and 54 form a p-n junction  
10 device. An ohmic contact 55 is made to the second Group III nitride layer 54, and an ohmic contact 56 is formed on the silicon carbide substrate so that a current supplied across the first and second ohmic contacts to the p-n junction device produces a high  
15 light intensity output therefrom.

As indicated by the dotted line in Figure 4, the buffer 52 preferably comprises a first layer 57 on the substrate 51 and formed of a graded composition of silicon carbide aluminum gallium nitride in which the  
20 portion adjacent the substrate is substantially entirely silicon carbide and the portion furthest from the substrate is substantially entirely aluminum gallium nitride with the portions therebetween being progressively graded in content from predominantly  
25 silicon carbide to predominantly aluminum gallium nitride.

A second buffer layer 58 is upon the first layer 57 and is formed of a graded composition of aluminum gallium nitride. As described with respect to  
30 earlier embodiments, the composition of the graded second layer 58 is progressively graded from a composition matching the composition of the first buffer layer 57 at the point where layers 58 and 57 join, to a composition matching the composition of the  
35 lower Group III nitride layer 53 of the diode.

In the diode 50 illustrated in Figure 4, the nitride layers 53 and 54 are selected from the group

-16-

consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one or a fraction between zero and one, and  
5 alloys of silicon carbide with such ternary Group III nitrides. It will thus be understood that in this and the previous embodiment, the junction can be a homostructure, a single-heterostructure, or a double-heterostructure.

10 The buffer 52 can alternatively comprise a lower intermediate layer 57 formed of silicon carbide positioned on the silicon carbide substrate 51 and an upper intermediate layer 58 formed of a nitride alloy positioned on the lower intermediate layer 57.

15 The buffer can include at least one graded layer of silicon carbide and a Group III nitride in which the graded layer is silicon carbide at the interface with the substrate 51, and the graded layer is a composition matching the composition of the lowest  
20 layer of the active device at the interface with the junction structure.

As in earlier embodiments, the light-emitting diode can have the upper surface of the silicon carbide substrate doped with aluminum.

25 As discussed with reference to some of the other figures herein, the characteristics of the crystals according to the present invention are generally superior to any exhibited by any prior devices. Thus, a double crystal x-ray rocking curve  
30 for GaN grown on SiC substrates according to the present invention has a full width half maximum of about 85 arcseconds (Figure 6).

As noted above, the lifetime of an LED is defined by the LED degradation time to a light emitting  
35 output of only about 50% of the initial light emitting output of the LED. As set forth above, Figure 5 graphically illustrates relative intensity over time of

-17-

a prior art LED formed of GaN on sapphire as compared to an LED according to the present invention. Figure 5 best illustrates the significant improvement of the lifetime of an LED according to the present invention.

5 The devices were burned in at 50 milliamps.

As illustrated in Figure 5, after an extended period of time of supplying current to an LED according to the present invention, as much as 10,000 or more hours, the LED continues to emit a high intensity light

10 output, i.e., greater than about 90% of the initial light intensity output, and much greater than the about 55% of the initial light intensity output exhibited by the GaN on sapphire LED after as little as 1000 hours burn-in. In Figure 5, the dotted line predicts the

15 performance of GaN on SiC based on the well-established performance of SiC on SiC.

Nitride alloys are often difficult to grow two-dimensionally on silicon carbide using conventional technology, primarily because of the difference in the

20 surface energy between the two kinds of materials. More specifically, conventional growth techniques at relatively high temperatures (i.e., higher than about 1000°C) tend to cause three-dimensional growth on the upper surface of the silicon carbide substrate. This

25 three-dimensional growth occurs to such an extent as to form small individual islands of semiconductor material on the upper surface of the substrate with a poor surface coverage. Further growth of these islands is still three-dimensional, and results in very rough as-

30 grown surface of nitride alloys. At relatively low temperatures, i.e., less than 1000°C, however, much smaller islands of nitride alloys with much higher density can be grown on the surface of the silicon carbide substrate. After a very short period of

35 further growth at the conventional growth temperatures, these islands coalesce and cover almost all the upper surface of the substrate. Further growth on this

-18-

surface is the growth of nitride alloys on nitride alloys and is dominated by two-dimensional lateral growth. This results in specular as-grown surface of the film and high electrical and structural quality of the nitride alloys. The p-n junction device of a Group III nitride is then formed on the gallium nitride layer using techniques such as chemical vapor deposition (CVD) or molecular beam epitaxy (MBE); see e.g., commonly assigned U.S. Patent No. 5,210,051.

10                Figures 6-9 illustrate various other performance and construction characteristics of an extended lifetime LED according to the present invention. More particularly, Figure 6 graphically illustrates a double crystal X-ray rocking curve, i.e.,  
15    counts per second as compared to angle, for a GaN layer on a SiC substrate according to the present invention. An analysis of the angular position, intensity, and peak width of x-ray beams diffracted by crystalline material provides information on the crystal structure  
20    of the material. In this example, the full width half maximum (FWHM) for the base GaN of an LED according to the present invention was found to be about 85 arcseconds. Because the X-ray rocking curve measurements indicate that the crystal quality of the  
25    GaN on SiC substrate are relatively high, resulting LED are expected to provide the high intensity, and long lifetime characteristics that are desired.

              Figure 7 graphically illustrates luminescence as compared to energy output of the base GaN on SiC of  
30    an extended lifetime LED according to the present invention. The graph illustrates the results of photoluminescence measurements at an excitation of 325 nm, and a temperature of 295 K. Uniform emission was observed across the surface. Room temperature  
35    photoluminescence shows that the emission is dominated by the band edge exciton at 3.41 eV which is typically dominated by the defect peak at 2.2 eV for layers grown

-19-

on sapphire, again indicating the high quality of GaN on SiC substrates according to the present invention.

Figure 8 is an Auger electron spectrum showing that an alloy layer according to the present invention contained all five elements in the SiC-AlN-GaN alloy: Si, C, Al, N and Ga.

Cathodoluminescence measurements were performed on SiC-AlN-GaN alloy layers at about 80° Kelvin (K) and showed several peaks in the ultraviolet (UV) and violet regions.

Figure 9 graphically illustrates the resulting edge peak energy as a function of silicon carbide concentration for these layers according to the present invention. As shown, the photon energy for the edge peak depends on the SiC concentration in the alloy layer. For a layer with a SiC concentration of about 10 mole%, the edge peak was detected at a wavelength of about 300 nm.

In the drawings and specification, there has been disclosed typical preferred embodiments of the invention and, although specific terms are employed, the terms are used in a generic and descriptive sense only and not for the purposes of limitation. The invention has been described in considerable detail with specific reference to various preferred embodiments. It will be apparent, however, that various modifications and changes can be made within the spirit and scope of the invention as described in the foregoing specification and defined in the appended claims.

-20-

## CLAIMS:

1. A light emitting diode that emits in the blue portion of the visible spectrum and that is characterized by an extended lifetime, said light emitting diode comprising:
- a conductive silicon carbide substrate (21);
  - an ohmic contact (22) to said silicon carbide substrate;
  - a conductive buffer layer (23) on said substrate (21) and selected from the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one, or a fraction between zero and one,
  - quaternary Group III nitrides having the formula  $A_xB_yC_{1-x-y}N$  where A, B, and C are Group III elements; x and y, are zero, one, or a fraction between zero and one, and 1 is greater than (x + y), and alloys of silicon carbide with such ternary and quaternary Group III nitrides; and
  - a p-n junction diode structure (24) on said buffer layer in which the p-type and n-type layers are selected from the group consisting of binary Group III nitrides and ternary Group III nitrides.
2. A light emitting diode according to Claim 1 wherein said p-n junction diode structure is selected from the group consisting of homostructures and single heterostructures.
3. A light emitting diode according to Claim 1 wherein said p-n junction diode structure comprises a double heterostructure in which the active and heterostructure layers are selected from the group consisting of binary Group III nitrides and ternary Group III nitrides.

-21-

4. A light emitting diode according to Claim  
1 wherein said buffer layer comprises gallium nitride,  
and further comprising a gallium nitride epitaxial  
layer on said buffer layer between said gallium nitride  
5 buffer layer and said junction diode structure.

5. A light emitting diode according to Claim  
1 and further comprising an ohmic contact to the top of  
said junction diode structure, and wherein said ohmic  
contact to said substrate is on the bottom of said  
10 substrate to thereby form a vertical device structure.

6. A light emitting diode according to Claim  
3 wherein said double heterostructure comprises:  
an active layer; and  
upper and lower heterostructure layers  
15 adjacent said active layer, and formed of a composition  
selected from the group consisting of gallium nitride,  
aluminum nitride, indium nitride, ternary Group III  
nitrides having the formula  $A_xB_{1-x}N$ , where A and B are  
Group III elements and where x is zero, one, or a  
20 fraction between zero and one, and alloys of silicon  
carbide with such ternary Group III nitrides.

7. A light emitting diode according to Claim  
3 wherein said double heterostructure comprises an  
active layer selected from the group consisting of  
25 gallium nitride, aluminum nitride, indium nitride,  
ternary Group III nitrides having the formula  $A_xB_{1-x}N$ ,  
where A and B are Group III elements and where x is  
zero, one, or a fraction between zero and one, and  
alloys of silicon carbide with such ternary Group III  
30 nitrides.

-22-

8. A light emitting diode according to Claim 6 wherein said heterostructure layers have the formula  $\text{Al}_x\text{Ga}_{1-x}\text{N}$ , and where x is 0, 1, or a fraction between 0 and 1.

5 9. A light emitting diode according to Claim 6 wherein said heterostructure layers have a bandgap larger than said active layer, and said heterostructure layers have a refractive index smaller than said active layer.

10 10. A light emitting diode according to Claim 6 wherein said upper heterostructure layer has the opposite conductivity type from said lower heterostructure layer.

11. A light emitting diode according to  
15 Claim 6 wherein said active layer has the composition  $\text{In}_z\text{Ga}_{1-z}\text{N}$ , where z is a fraction between zero and one.

12. A light emitting diode according to Claim 1 and further comprising a strain-minimizing contact layer above said double heterostructure that  
20 has a lattice constant substantially the same as said buffer layer.

13. A light emitting diode (LED) having an extended light emitting lifetime, the LED comprising:  
a conductive silicon carbide substrate (51);  
25 a conductive buffer layer (52) on said silicon carbide substrate and selected from the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $\text{A}_x\text{B}_{1-x}\text{N}$ , where A and B are Group III elements and where x  
30 is zero, one, or a fraction between zero and one, quaternary Group III nitrides having the formula  $\text{A}_x\text{B}_y\text{C}_{1-x-y}\text{N}$  where A, B, and C are Group III elements; x and y,



-23-

are zero, one, or a fraction between zero and one, and 1 is greater than  $(x + y)$ , and alloys of silicon carbide with such ternary Group III nitrides;

a first Group III nitride layer (53) formed  
5 on said buffer layer, said first Group III nitride layer having a first conductivity type;

a second Group III nitride layer (54) formed  
on said first Group III nitride layer, said second  
Group III nitride layer having a second conductivity  
10 type so that said first and second Group III nitride layers form a p-n junction device;

an ohmic contact (55) formed on said second  
Group III nitride layer; and

a second ohmic contact (56) formed on said  
15 silicon carbide substrate so that a current supplied across said first and second ohmic contacts to the p-n junction device produces a high light intensity output therefrom.

14. A light emitting diode according to  
20 Claim 1 or Claim 13 wherein said silicon carbide substrate has a polytype selected from the group consisting of 3C, 4H, 6H, and 15R.

15. A light emitting diode according to  
Claim 13 wherein said nitride layers are selected from  
25 the group consisting of gallium nitride, aluminum nitride, indium nitride, ternary Group III nitrides having the formula  $A_xB_{1-x}N$ , where A and B are Group III elements and where x is zero, one, or a fraction between zero and one, quaternary Group III nitrides  
30 having the formula  $A_xB_yC_{1-x-y}N$  where A, B, and C are Group III elements; x and y, are zero, one, or a fraction between zero and one, and 1 is greater than  $(x + y)$ , and alloys of silicon carbide with such ternary Group III nitrides.

-24-

16. A light emitting diode according to Claim 13 wherein said first and second Group III nitride layers comprise a structure selected from the group consisting of homostructures, single  
5 heterostructures, and double heterostructures.

17. A light emitting diode according to Claim 13, wherein said conductive buffer layer comprises a lower intermediate layer formed of silicon carbide positioned on said silicon carbide substrate  
10 and an upper intermediate layer formed of a nitride alloy positioned on said lower intermediate layer.

18. A light emitting diode according to Claim 1 or Claim 13 wherein said buffer layer comprises:

15 a first layer upon said substrate formed of a graded composition of silicon carbide aluminum gallium nitride in which the portion adjacent the substrate is substantially entirely silicon carbide and the portion furthest from the substrate is substantially entirely  
20 aluminum gallium nitride with the portions therebetween being progressively graded in content from predominantly silicon carbide to predominantly aluminum gallium nitride; and

a second layer upon said first layer and  
25 formed of a graded composition of aluminum gallium nitride.

19. A light emitting diode according to Claim 18 wherein the composition of said graded second layer is progressively graded from a composition  
30 matching the composition of said first buffer layer to a composition matching the composition of the lowest layer of said junction device.

-25-

20. A light emitting diode according to Claim 1 or Claim 13 wherein said buffer includes at least one graded layer of silicon carbide and a group III nitride in which the graded layer is silicon  
5 carbide at the interface with said substrate, and the graded layer is a composition matching the composition of the lowest layer of said junction device at the interface of said junction device with said graded layer.

1/4

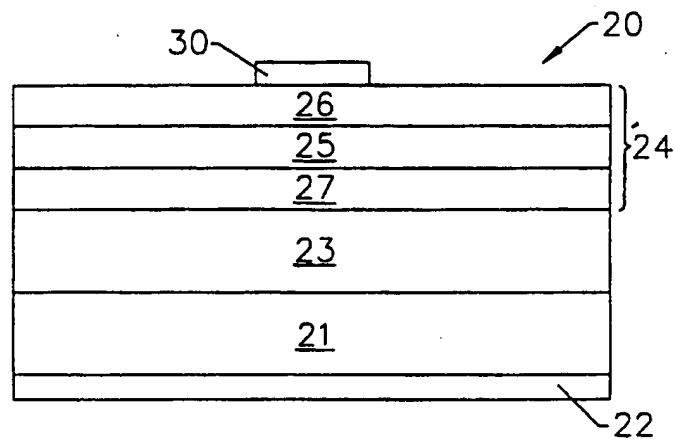


FIG. 1.

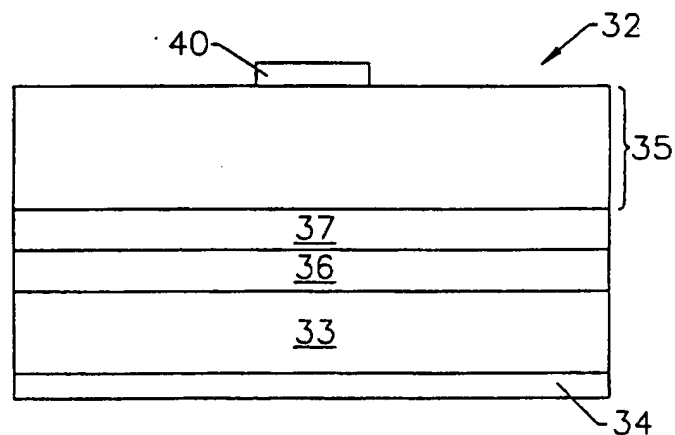


FIG. 2.

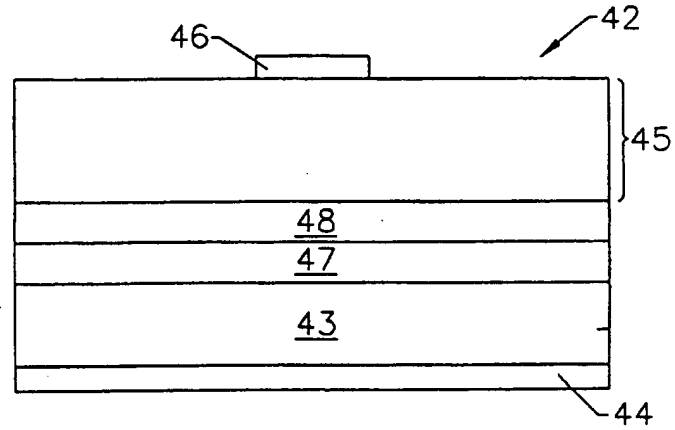


FIG. 3.

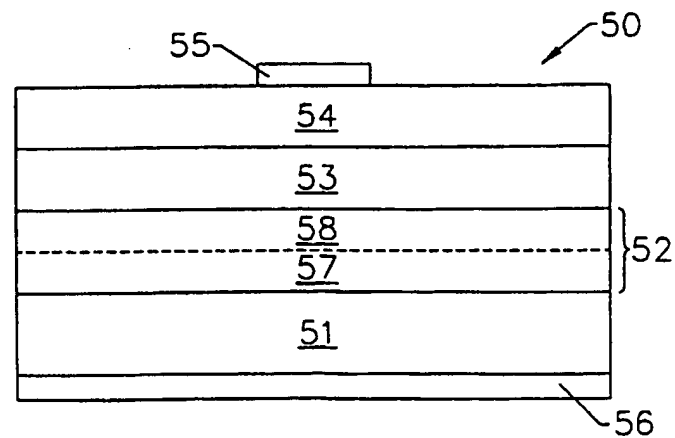
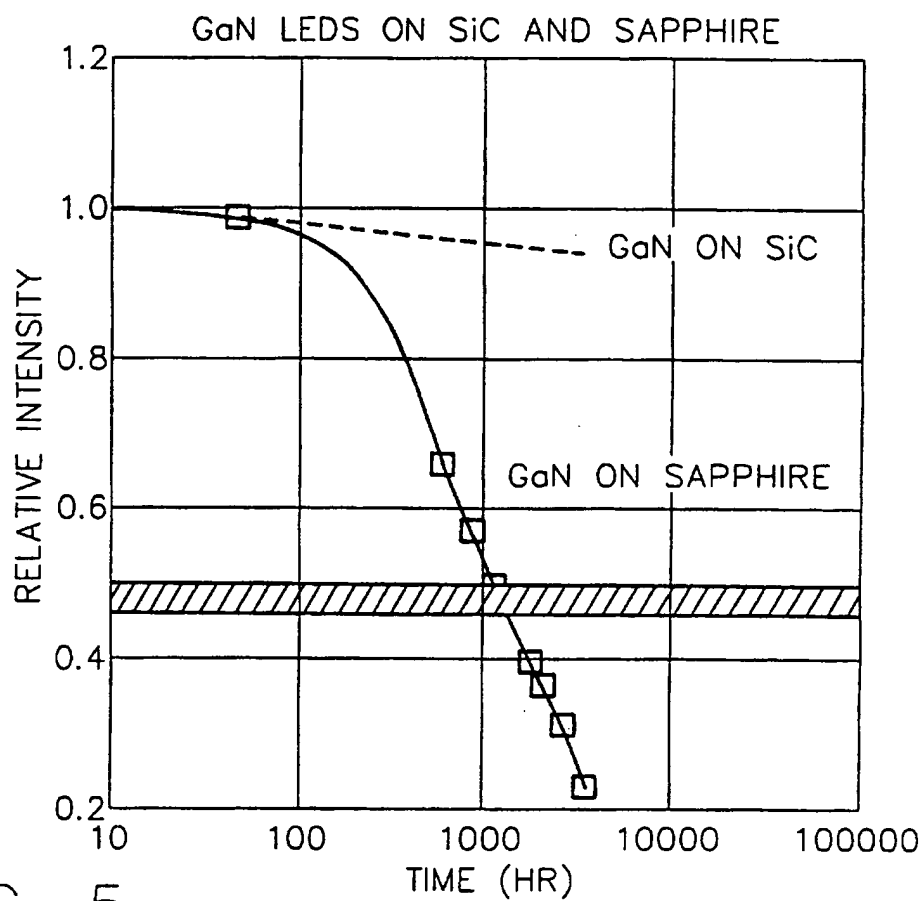
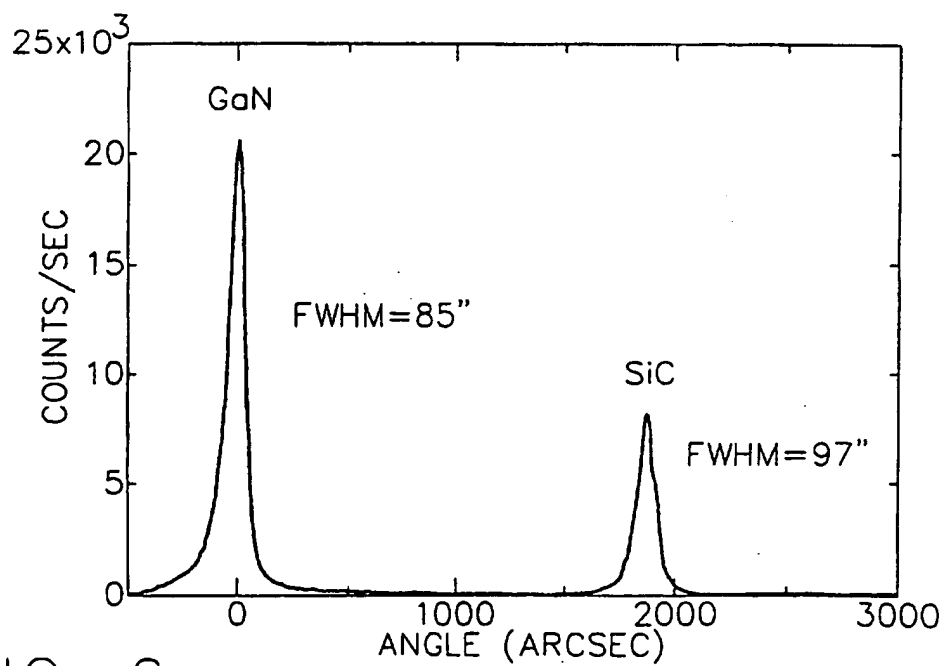


FIG. 4.

FIG. 5.FIG. 6.

3/4

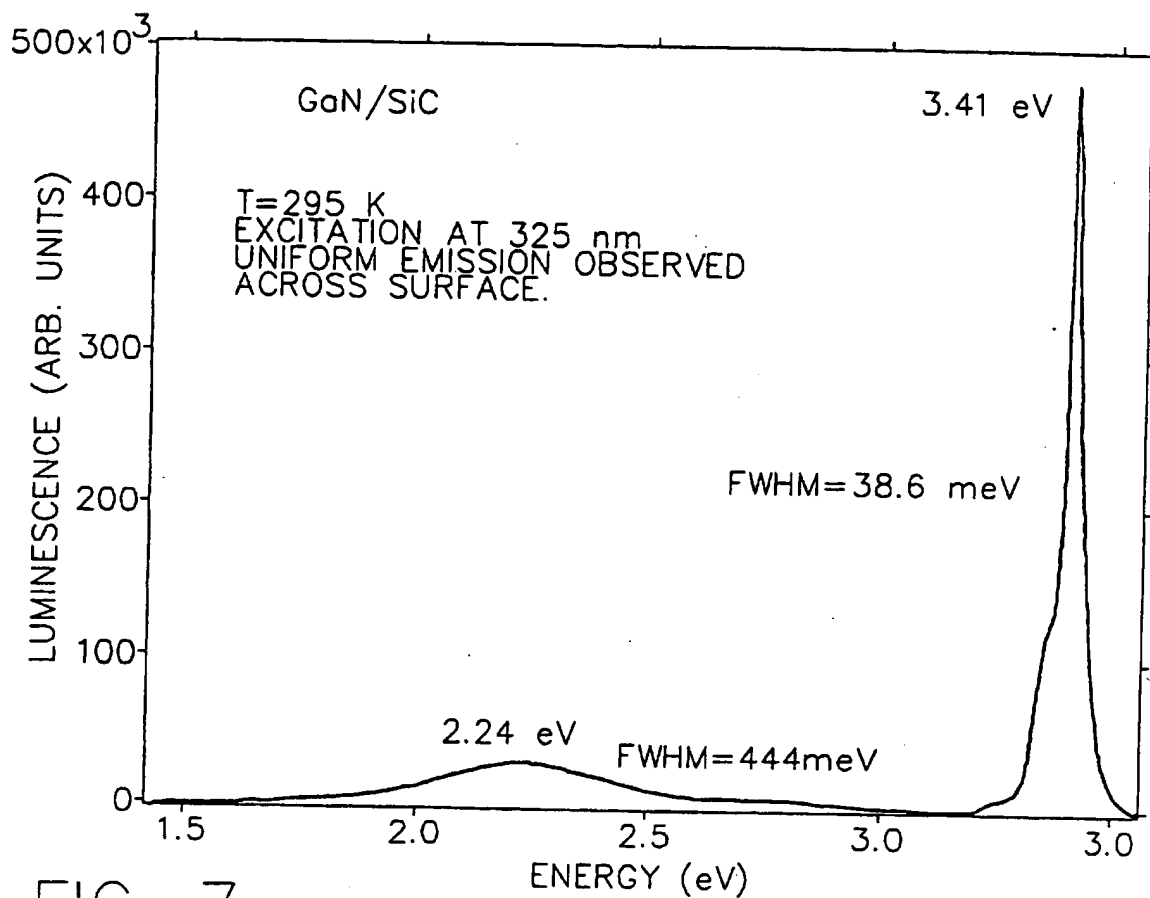


FIG. 7.

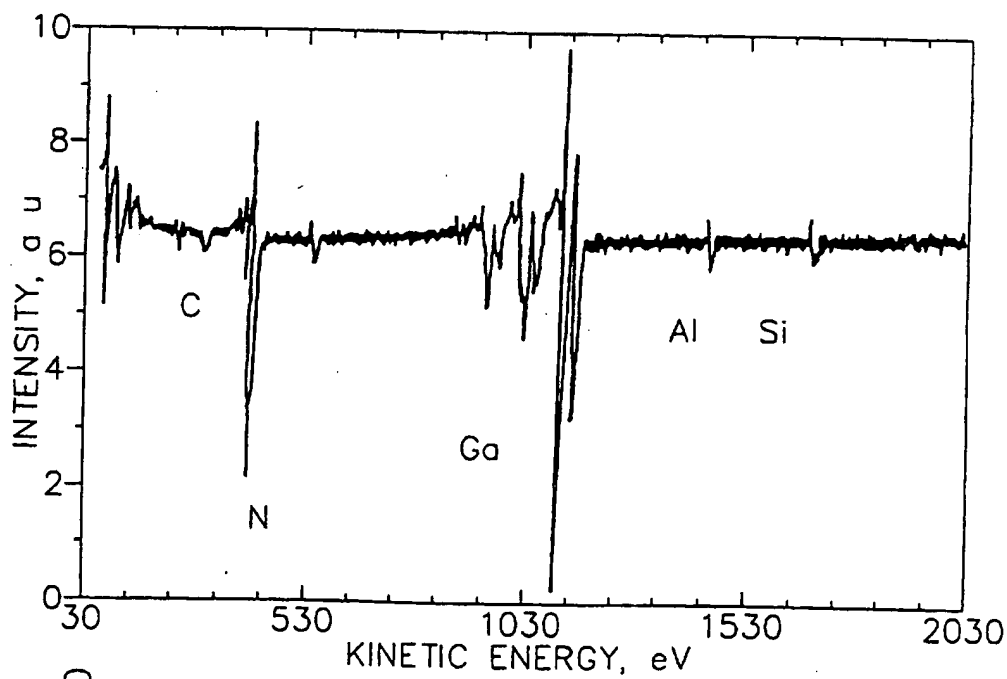
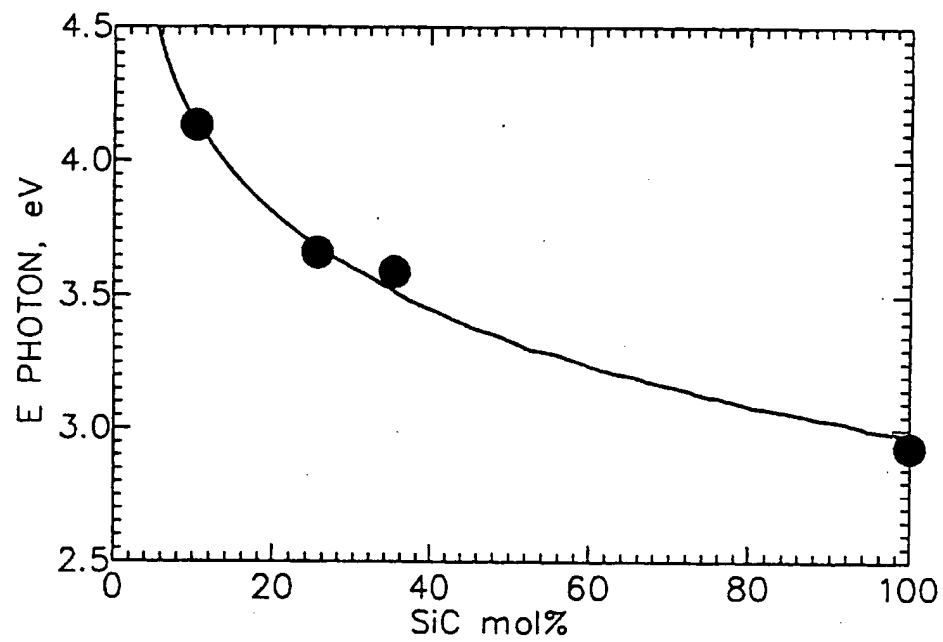


FIG. 8.

FIG. 9.

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/11472

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H01L33/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,5 273 933 (HATANO AKO ET AL) 28 December 1993 cited in the application see column 4, line 44 - line 50; figure 5 ---	1,3, 5-10,12, 13,15,16
X	US,A,5 247 533 (OKAZAKI NOBUO ET AL) 21 September 1993  see figure 3; example 3 ---	1,3, 5-10, 13-16
A	PATENT ABSTRACTS OF JAPAN vol. 017 no. 640 (E-1465) ,26 November 1993 & JP,A,05 206513 (SHARP CORP) 13 August 1993, see abstract --- -/--	1,2,5, 13,15,16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

16 November 1995

Date of mailing of the international search report

29. 11. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

De Laere, A



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 95/11472

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 497 350 (NICHIA KAGAKU KOGYO KK) 5 August 1992 see page 3, line 6 - line 16 see page 6, line 6 ---	1,2,5, 13-16
A	US,A,5 210 051 (CARTER JR CALVIN H) 11 May 1993 see column 10, line 32 - line 63 see column 11, line 64 - column 12, line 4 see column 13, line 19 - line 34 ---	1,2,5, 13-16
P,X	US,A,5 393 993 (EDMOND JOHN A ET AL) 28 February 1995  see column 2, line 18 - line 62 see column 5, line 30 - line 58; claims -----	1-3, 5-11, 13-16

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 95/11472

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5273933	28-12-93	JP-A- 5109636	30-04-93
US-A-5247533	21-09-93	JP-A- 4242985	31-08-92
EP-A-0497350	05-08-92	JP-A- 4297023	21-10-92
		DE-D- 69203736	07-09-95
		KR-B- 9506968	26-06-95
		US-A- 5290393	01-03-94
US-A-5210051	11-05-93	NONE	
US-A-5393993	28-02-95	AU-B- 1300295	03-07-95
		WO-A- 9517019	22-06-95